


# GATE VALVES - SOCKET WELD - THREADED - BUTT WELD ENDS

CLASS. 800

BOLTED OR WELDED BONNET

MOD: 081SW - 081TH - 081BW R.B.

MOD: 061SW - 061TH - 061BW F.B.



API 602 - REDUCE BORE

SIZE	A open	C	PORT	U	V	Kg.
1/2"	148	80	10	21.8	78	1.7
3/4"	175	90	14	27.1	78	2.6
1"	195	110	18	33.8	98	3.5
1.1/2"	275	130	30	48.7	140	7.2
2"	290	130	36.5	61.1	140	8.8

API 600 - FULL BORE


SIZE	A open	C	PORT	U	V	Kg.
1/2"	175	90	14	21.8	78	2.6
3/4"	195	110	18	27.1	98	3.5
1"	275	120	25	33.8	120	6.5
1.1/2"	290	130	36	48.7	140	8.8
2"	335	160	48	61.1	180	15

CLASS. 1500

BOLTED OR WELDED BONNET

MOD: 051SW - 051TH - 051BW R.B.

MOD: 151SW - 151TH - 151BW F.B.

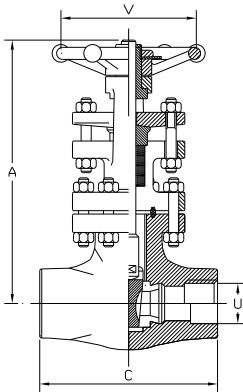

API 602 - REDUCE BORE

SIZE	A open	C	PORT	U	V	Kg.
1/2"	175	90	10	21.8	78	2.6
3/4"	195	110	14	27.1	98	3.5
1"	230	120	18	33.8	120	6.5
1.1/2"	290	130	29	48.7	140	8.8
2"	335	160	36.5	61.1	180	15


API 600 - FULL BORE

SIZE	A open	C	PORT	U	V	Kg.
1/2"	223	80	14	21.8	120	3.8
3/4"	262	92	18	27.1	120	4.9
1"	308	114	24	33.8	120	8.1
1.1/2"	347	160	36.5	48.7	180	11.2
2"	438	184	40	61.1	300	28.5

CLASS. 2500

BOLTED OR WELDED BONNET

MOD: 251SW - 251TH - 251BW

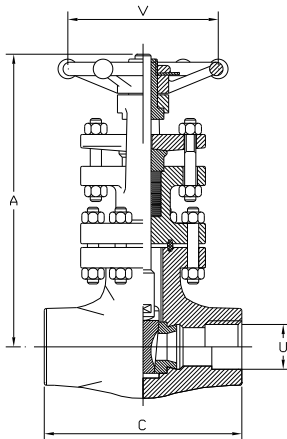

API 600 - FULL BORE

SIZE	A open	C	PORT	U	V	Kg.
1/2"	263	92	10.5	21.8	140	5.1
3/4"	305	114	14	27.1	140	8.5
1"	336	128	20	33.8	180	12.6
1.1/2"	416	184	31	48.7	300	29.7
2"	476	228	36.5	61.1	300	44